

I C ENGINE DRIVEN VARIABLE DISPLACEMENT PUMPING SYSTEMS

Publication number: GB2171757

Publication date: 1986-09-03

Inventor: KOBAYASHI TAKESHI; TAKEHARA HIDEYUKI;
TAKAHASHI AKIHISA; MORIYA YUKIO; KAWAI HIDEO

Applicant: KOMATSU MFG CO LTD



Classification:

- International: E02F9/22; F02D29/04; F02D41/08; E02F9/22;
F02D29/04; F02D41/08; (IPC1-7): F02D29/04
- European: E02F9/22F4C; F02D29/04; F02D41/08B

Application number: GB19860004509 19860224

Priority number(s): JP19850037641 19850228; JP19850037642 19850228;
JP19850037643 19850228

Also published as:

 US4773369 (A1)
 DE3606391 (A1)

Report a data error here

Abstract not available for GB2171757

Data supplied from the *esp@cenet* database - Worldwide

BEST AVAILABLE COPY

(12) UK Patent Application (19) GB (11) 2 171 757 A

(43) Application published 3 Sep 1986

(21) Application No 8604909

(22) Date of filing 24 Feb 1986

(30) Priority data

(31) 60/037641	(32) 28 Feb 1985	(33) JP
60/037642	28 Feb 1985	
60/037643	28 Feb 1985	

(71) Applicant
Kabushiki Kaisha Komatsu Selsakusho (Japan),
3-6 Akasaka 2-chome, Minato-ku, Tokyo, Japan

(72) Inventors
Takeshi Kobayashi
Hideyuki Takehara
Akahisa Takahashi
Yukio Moriya
Hideo Kawai

(74) Agent and/or Address for Service
Marks & Clerk,
Suite 301, Sunlight House, Quay Street, Manchester
M3 3JY

(51) INT CL⁴
F02D 29/04

(52) Domestic classification (Edition H):
F1B 8F
G3N 287 288A 397 GBB3

(56) Documents cited
None

(58) Field of search
F1B
G3N
Selected US specifications from IPC sub-class F02D

(54) I.c. engine driven variable displacement pumping systems

(57) The engine which has an electronic fuel supply governor is operated with a lower fuel consumption than that at the rated engine speed corresponding to the load provided by the pump or pumps. The engine speed is reduced and operates with the same output and a higher torque and the pump provides the same load by having its displacement increased corresponding to the reduction in drive speed.


The drawing(s) originally filed was/were informal and the print here reproduced is taken from a later filed formal copy.

GB 2 171 757 A

2171757


FIG. 1

PRIOR ART

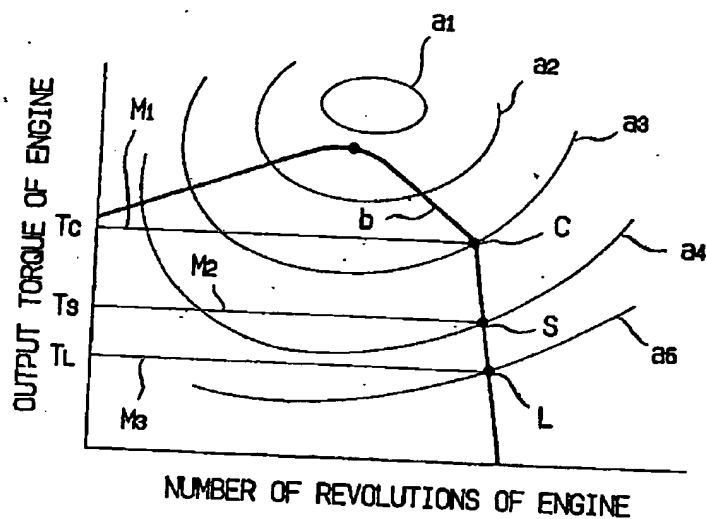


PRIOR ART

FIG. 2

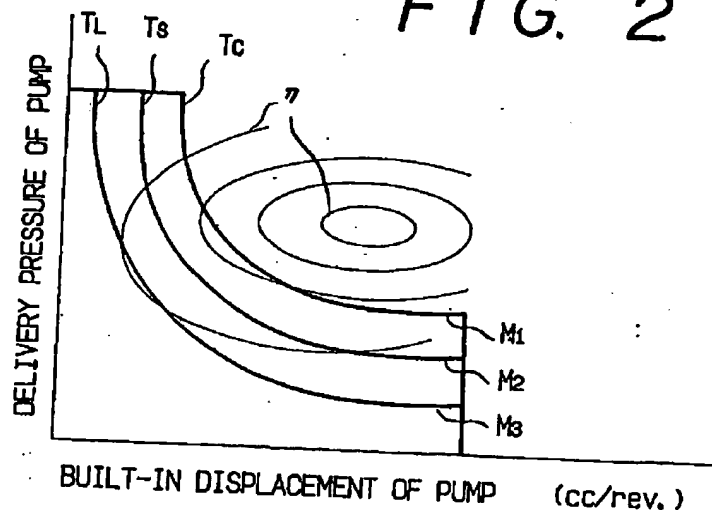


2171757

211

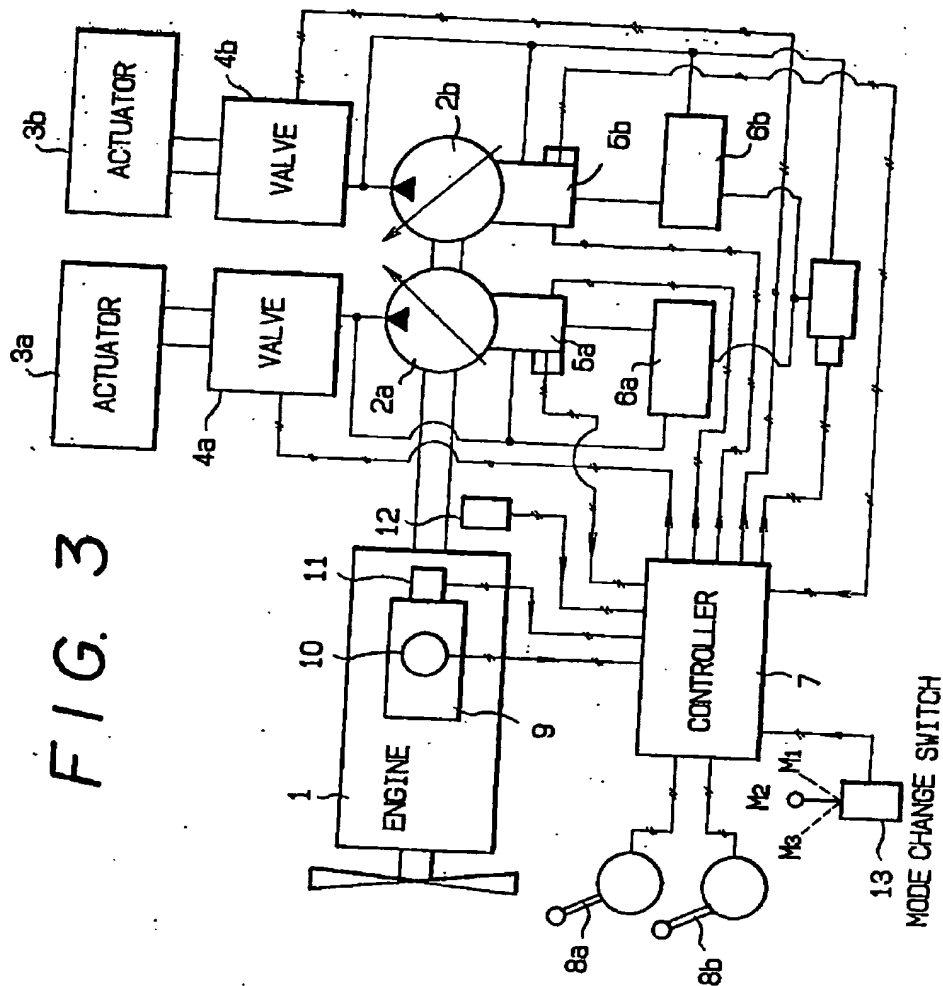

3/11


2171757

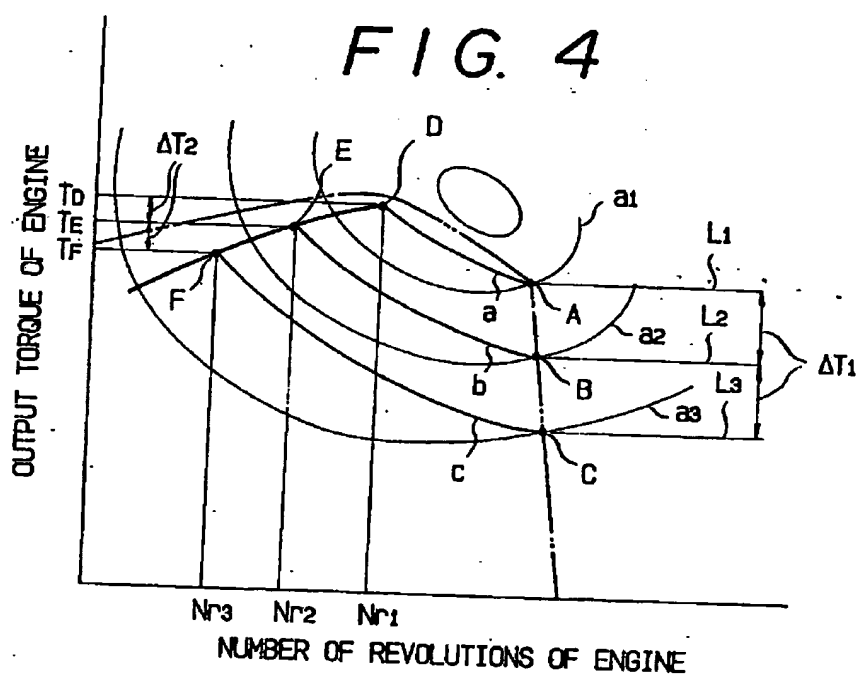

4/11

2171757

FIG. 5

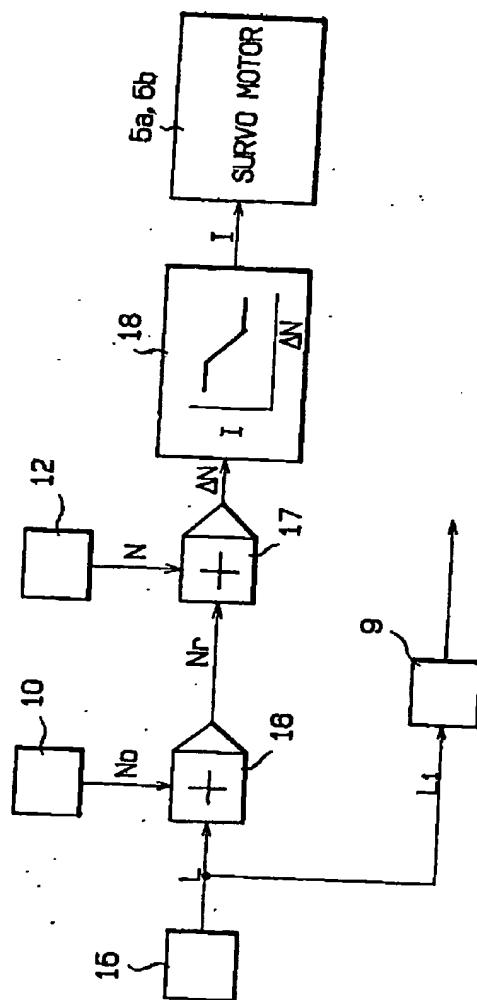

5/11

2171757

FIG. 6


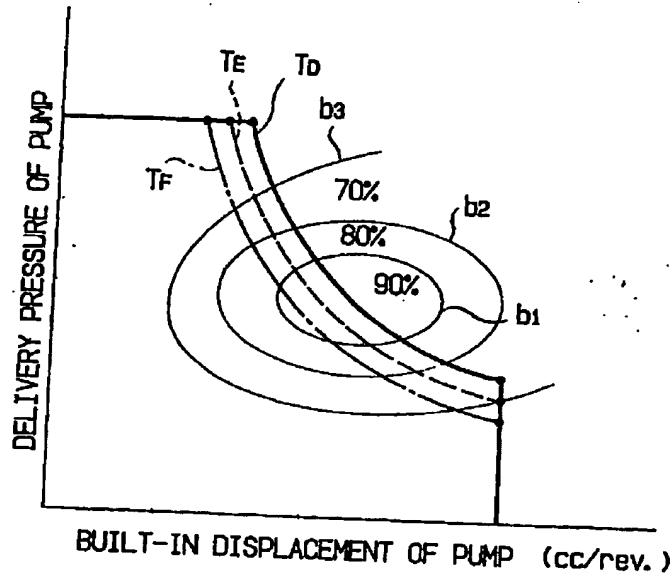



FIG. 7

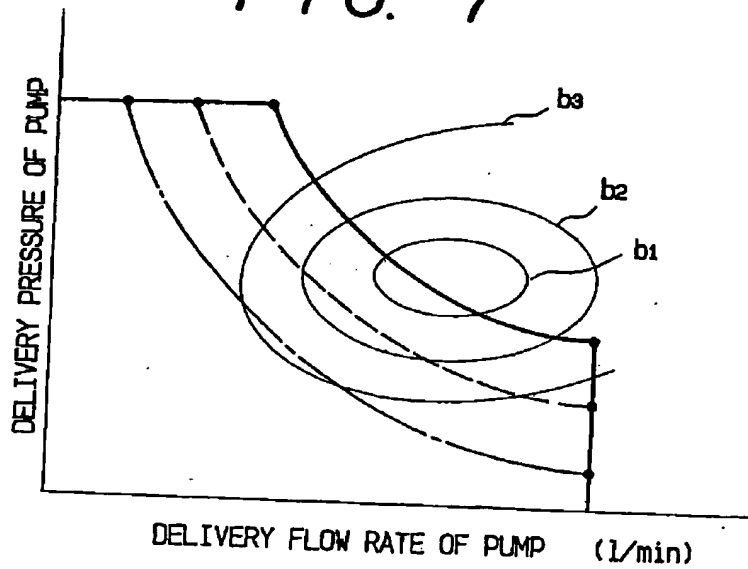

6/1


2171757

FIG. 8

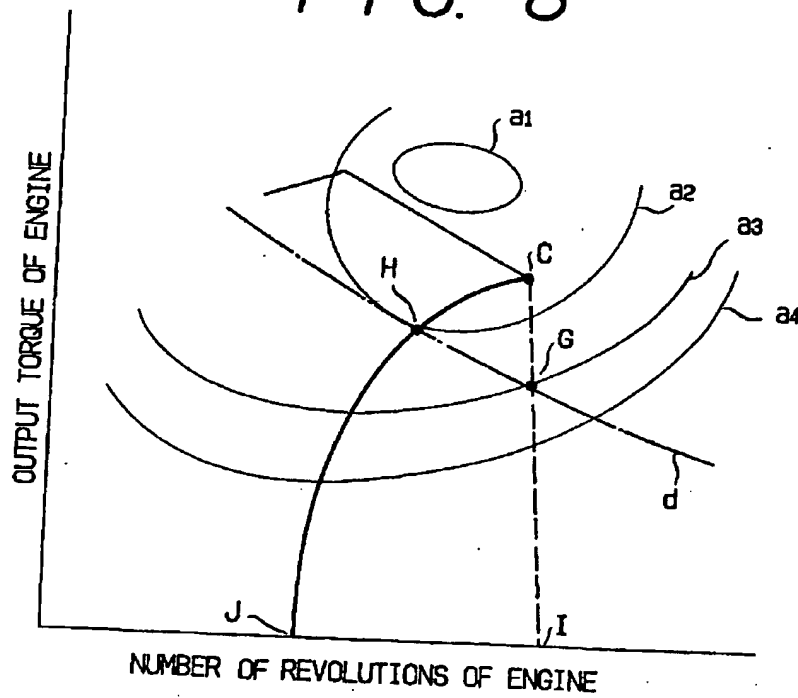

2171757

FIG. 9

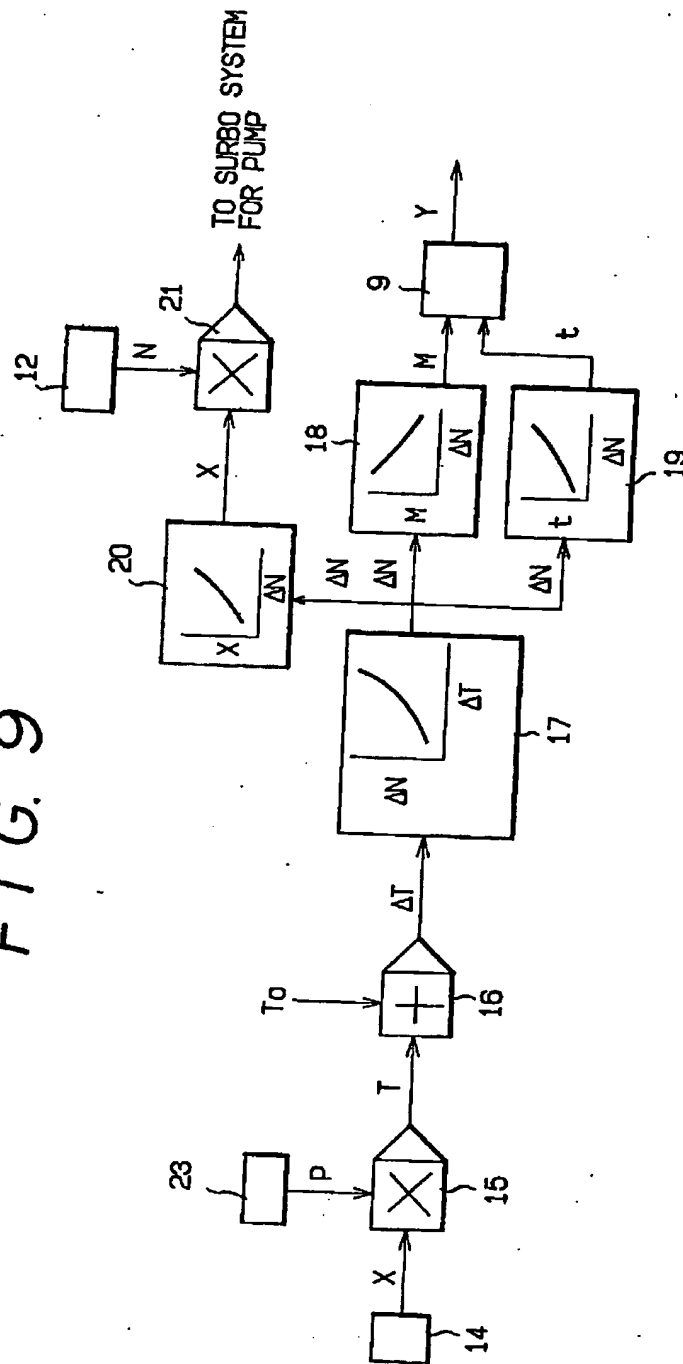

8/11

2171757

FIG. 10


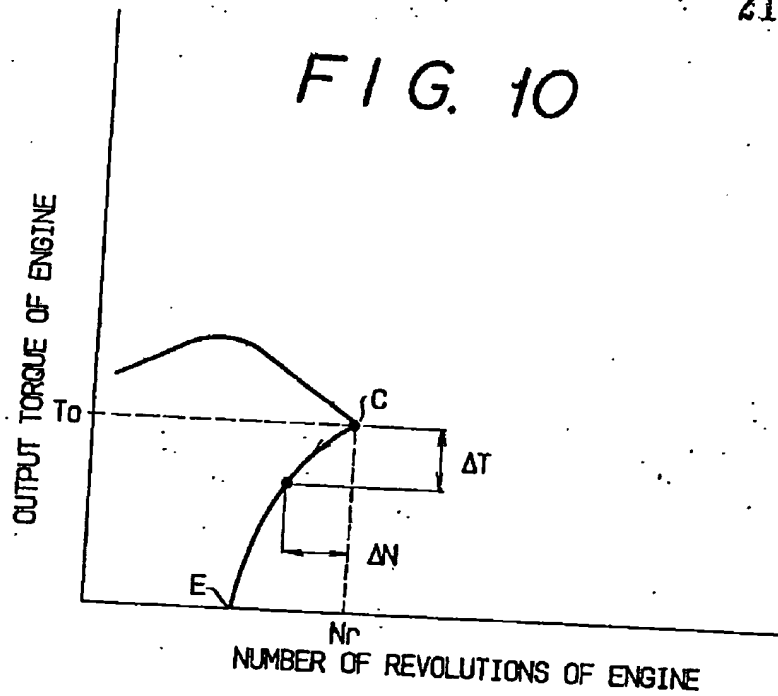


FIG. 11

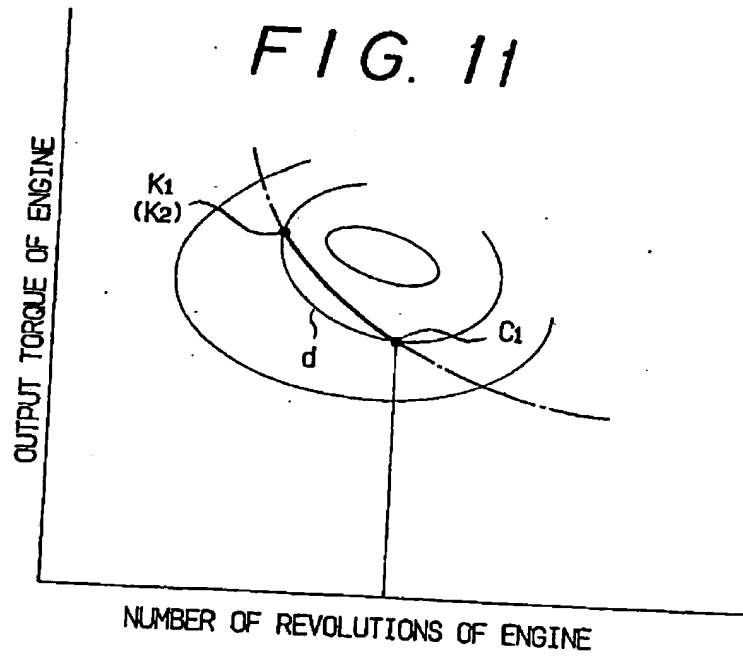

q_{lh}

2171757

FIG. 12



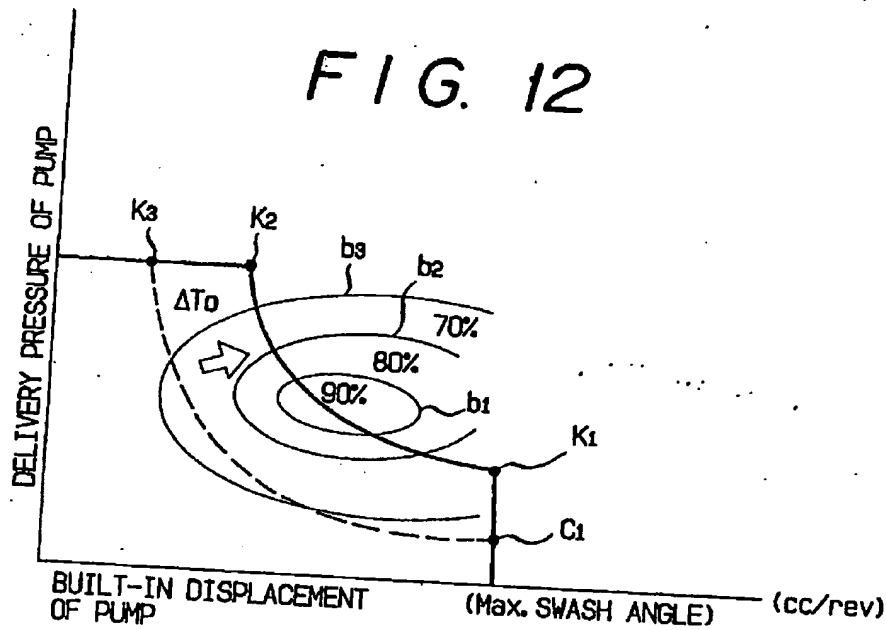


FIG. 13

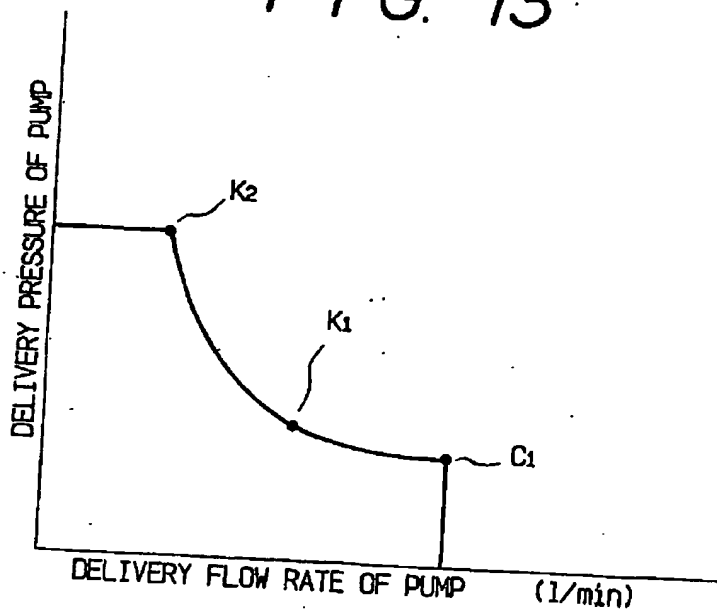


2171757

FIG. 14

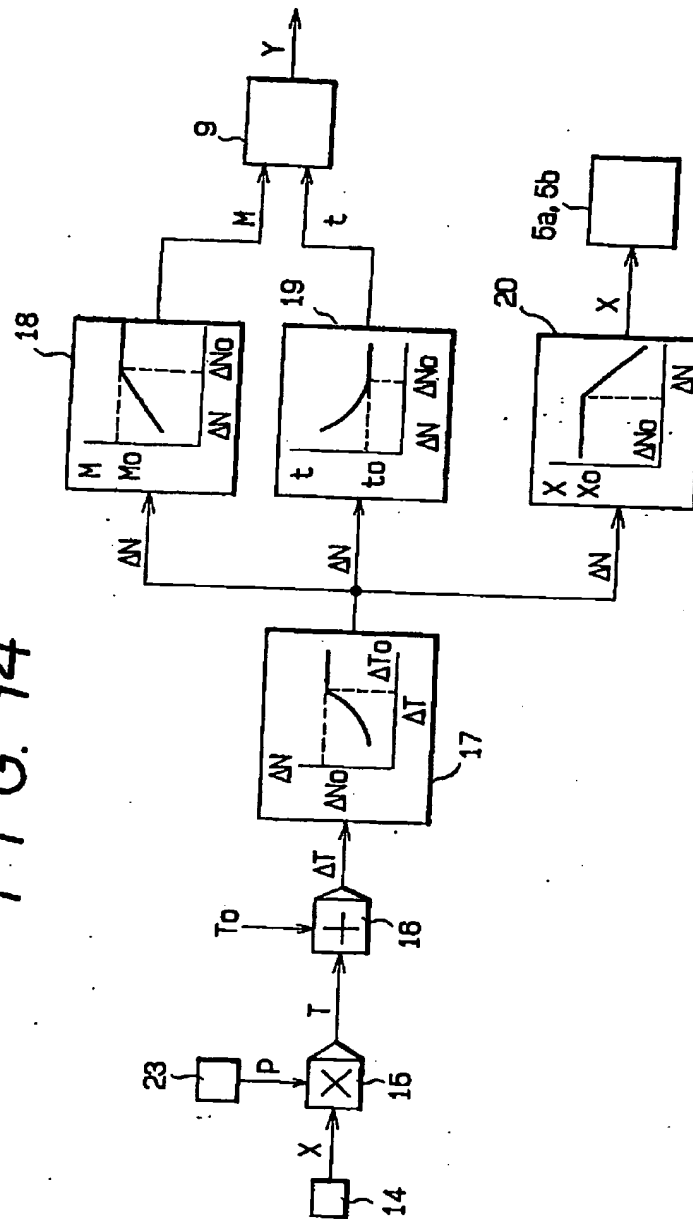

11/11

2171757

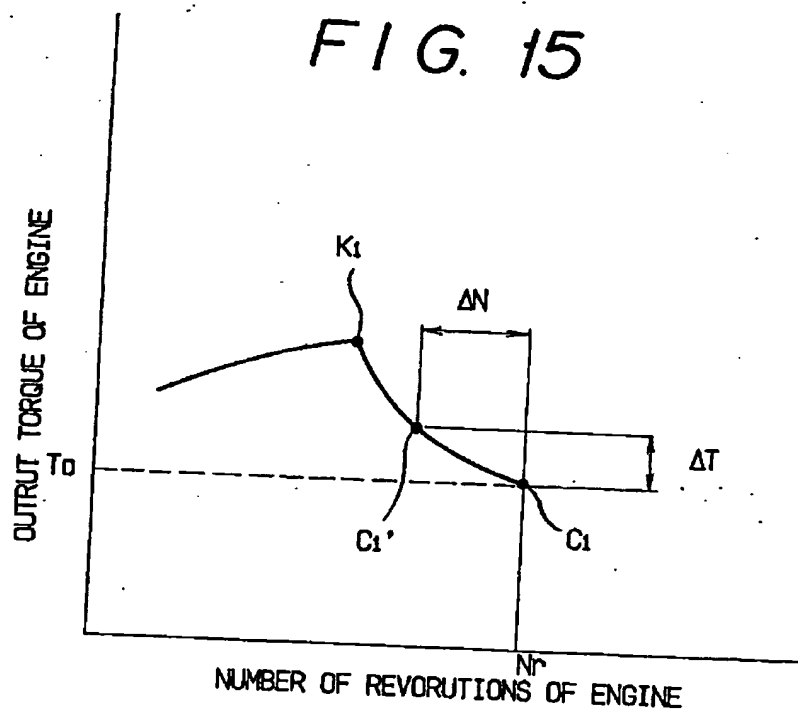

1

GB 2 171 757A

1

SPECIFICATION

Method of controlling an output of an internal combustion engine and/or a variable displacement hydraulic pump driven by the engine

BACKGROUND OF THE INVENTION

1. Field of the Invention:

This invention relates to a method of controlling an output of an internal combustion engine and/or a variable displacement hydraulic pump driven by the engine. More particularly, it relates to a control method which enables the efficient operation of an internal combustion engine or a pump driven by the engine, or both, while maintaining the fuel consumption of the engine at a low level.

2. Description of the Prior Art:

There is known an internal combustion engine of the type which is controlled in accordance with a specific pattern irrespective of any change in the torque requirement of a variable displacement hydraulic pump (hereinafter referred to simply as the variable pump) which is driven by the engine, i.e., its built-in displacement multiplied by its output pressure. The torque requirement of the variable pump is altered by a mode selector control device to maintain the fuel consumption of the engine at a low level. See European Patent Application Publication No. 0 156 399 by the same applicant as the applicant of this application.

The engine has a fuel injection device including a mechanical all-speed type governor. The curve *b* in Fig. 1 is a governor control curve and each of curves *a*₁ to *a*₃ shows a specific amount of fuel consumed by the engine in such a way that its fuel consumption decreases in the order of curves *a*₃ to *a*₁. The fuel consumption of the engine is always fixed at a specific point on the governor control curve *b*. For example, it is shown by the curve *a*₃ at a rated point C on the curve *b*.

The work (mode) of the variable pump which is driven by the engine having such governor control characteristics may, for example, be variable in three stages, i.e., a high-load mode *M*₁, a medium-load mode *M*₂, and a low-load mode *M*₃, as shown in Fig. 2. Then, the engine is controlled by the mechanical governor for operation at points C (rated point), S and L on the governor control curve *b*, respectively. When the mode of the variable pump is altered, the engine has an output torque which greatly differs from one mode to another, though the number of revolutions of the engine is maintained substantially at a constant level.

As a result, the torque requirement of the variable pump also differs greatly from one mode to another, as shown in Fig. 2. As the variable pump is so designed as to show the best efficiency in one of its modes, for example, *M*₁, its efficiency greatly differs from

one mode to another. Therefore, it has the disadvantage of failing to utilize the output of the engine effectively in either of the modes other than *M*₁.

Each of curves in Fig. 2 is a curve of equal variable pump efficiency. The efficiency of the pump is shown as increasing with a decrease in the radius of curvature of the curves.

Moreover, the control of the engine by the conventional mechanical governor has the disadvantage that the engine consumes a large amount of fuel at a low load, as shown at point L in Fig. 1.

SUMMARY OF THE INVENTION

Under these circumstances, it is a first object of the present invention to provide a method of controlling an output of an internal combustion engine provided with an electronic governor in which, in order to reduce a difference between curves of equal pump output (along each of which the output pressure of a variable pump multiplied by its built-in displacement expressed as cc/rev. is constant) from one mode of the pump to another, i.e., a difference between torque requirements of the pump from one mode to another, the engine is operated in such a manner that an output torque of the engine in a range of high speed revolutions at a rated point of each of the modes is altered to that at a given point on a curve of equal horsepower (along which the output torque of the engine multiplied by the number of revolutions of the engine is constant) in each mode where is near the maximum output torque point of the engine on the equal horsepower curve in each mode and has fuel consumption lower than that in the range of the high speed revolutions.

It is a second object of the present invention to provide a method of controlling an output of an internal combustion engine provided with an electronic governor for lowering the number of revolutions of the engine in accordance with a drop of its output torque below a predetermined level in order to reduce its fuel consumption and the noise which it produces, when it is operating at a low load.

It is a third object of the present invention to provide a method of controlling an output of an internal combustion engine provided with an electronic governor and an output of a variable pump driven by the engine, which is characterized by maintaining a swash plate for the variable pump at a maximum angle to minimize its built-in displacement at a low load, increasing the output torque of the engine along a curve of equal horsepower within a predetermined range of equal fuel consumption to increase an output pressure of the pump, and decreasing the angle of the swash plate, while maintaining the output torque of the engine at its increased level, to decrease the built-in displacement of the pump along a curve of equal pump output and increase its

output pressure with an increase in load, whereby the pressure loss of the variable pump is reduced and the output torque of the engine by which the pump is driven is effectively utilized.

These objects are attained by a method of controlling an output of an engine provided with an electronic governor device and/or at least one variable displacement hydraulic pump driven by the engine, characterized in that, when the engine is operated in a range of high speed revolutions approximately equal to or exceeding the number of revolutions at a rated point on a governor control curve specific to the engine, the engine is operated by the action of the electronic governor device at a given point on a curve of equal horsepower where an engine output torque is higher than that in the range of the high speed revolutions and where fuel consumption is lower than that in the range of the high speed revolutions, so that the engine and/or the pump may be operated with a high efficiency.

According to another aspect of the present invention, there is provided a method of controlling an output of an internal combustion engine provided with an electronic governor in which the output setting for the engine is variable in a plurality of modes to alter a torque requirement of a variable displacement hydraulic pump driven by the engine, which comprises operating the engine in such a manner that the output torque of the engine in a range of high speed revolutions at a rated point of each of the modes is altered to that at a given point on a curve of equal horsepower of the engine in each mode where a maximum output torque point of the engine on the equal horsepower curve is adjacent thereto and where fuel consumption is lower than that in the range of the high speed revolutions.

According to still another aspect of this invention, there is provided a method of controlling an output of an internal combustion engine provided with an electronic governor and adapted for driving at least a variable displacement hydraulic pump, which comprises reducing the number of revolutions of the engine in accordance with a ratio of reduction in the output torque of the engine to a level below a preset value.

According to a further aspect of the present invention, there is provided a method of controlling an output of an internal combustion engine provided with an electronic governor and a variable displacement hydraulic pump driven by the engine, which comprises maintaining a swash plate for the pump at a maximum angle to maximize its built-in displacement at a low load, increasing the output torque of the engine along a curve of equal engine horsepower within a predetermined range of equal fuel consumption to increase the output pressure of the pump, and decreasing the

angle of the swash plate, while maintaining the output torque of the engine at its increased level, to decrease the built-in displacement of the pump along a curve of equal pump output and increase its output pressure with an increase in load.

These and other objects, features and advantages of this invention will become apparent to anybody of ordinary skill in the art from the following detailed description and the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a graph showing the conventional control of an engine by a mechanical all-speed type governor;

Figure 2 is a graph showing the conventional output control for a variable displacement hydraulic pump;

Figure 3 is a general circuit diagram of a control system embodying the method of this invention for controlling the outputs of an engine and a plurality of variable displacement hydraulic pumps which are driven by the engine;

Figure 4 is a diagram showing a first embodiment of the method of this invention for controlling the output of an engine;

Figure 5 is a block diagram of a control system which is employed for carrying out the method shown in Fig. 4;

Figure 6 is a diagram showing a method embodying this invention for controlling the output of a variable displacement hydraulic pump;

Figure 7 is a graph showing the output of the pump controlled by the method shown in Fig. 6;

Figure 8 is a diagram showing a second embodiment of the method of this invention for controlling the output of an engine;

Figure 9 is a block diagram of a control system which is employed for carrying out the method shown in Fig. 8;

Figure 10 is a governor control curve for the engine controlled by the method shown in Fig. 8;

Figure 11 is a diagram showing a third embodiment of the method of this invention for controlling the output of an engine;

Figure 12 is a diagram showing the control of a variable displacement hydraulic pump matching the method shown in Fig. 11;

Figure 13 is a graph showing the output of the pump obtained by the control shown in Fig. 12;

Figure 14 is a block diagram of a control system which is employed for carrying out the controls shown in Figs. 11 and 12; and

Figure 15 is a graph showing the engine output control achieved by the method shown in Fig. 11.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

The control method of this invention will now be described in further detail with reference to Figs. 3 to 15.

Referring first to Fig. 3, there is diagrammatically shown a system for controlling the outputs of an engine 1 and two variable displacement hydraulic pumps 2a and 2b. An actuator 3a is connected to the pump 2a through a valve 4a, and another actuator 3b to the pump 2b through a valve 4b. A servo motor 5a for controlling the pump 2a is connected to its output side through a control valve 6a and a servo motor 5b for controlling the pump 2b is connected to its output side through a control valve 6b.

A controller 7 contains a microcomputer and a pair of electric control levers 8a and 8b are provided for controlling it. A fuel injector 9 is provided with an electronic governor. A governor potentiometer 10 is provided for detecting its throttle lever position. The fuel injector 9 is also provided with a rack position detector 11. A rotation sensor 12 is provided for detecting the number of revolutions of the engine 1. The outputs of these sensors, as well as those of the servo motors 5a and 5b, are transmitted to the controller 7. A mode change switch is shown at 13. The output signals of the governor potentiometer 10 and the rotation sensor 12 are processed by the microcomputer in the controller 7 so that it may output an appropriate rack position signal to control the injection of fuel.

Fig. 4 is a diagram showing a first embodiment of the method of this invention for controlling the output of the engine. A, B and C are the given points indicating the number of revolutions of the engine and its output torque which are required for enabling the hydraulic pump driven by the engine and set for producing a maximum output to produce the maximum output in three different modes L_1 , L_2 and L_3 , respectively. In other words, A, B and C are the rated load points for the first to third modes, respectively.

Curves a, b and c of equal engine horsepower pass through the rated load points A, B and C, respectively. Curves a_1 , a_2 and a_3 of equal fuel consumption also pass through the points A, B and C, respectively, and points D, E and F are given on the curves a, b and c, respectively.

The electronic governor in the fuel injector 7 is so set that the number of revolutions of the engine may be altered along a curve AD in the first mode L_1 , a curve BE in the second mode L_2 , or a curve CF in the third mode L_3 , depending on a change in load. One of the modes is selected in response to a corresponding mode change signal from the mode change switch 13.

A control system which may be used for carrying out the first embodiment of the method of this invention is shown in the block diagram of Fig. 5. A signal corresponding to

one of the modes, for example, the first mode L_1 , is inputted from the mode change switch 13 (Fig. 3) to the controller 7. The inputted mode L_1 signal is detected by a mode detector 15 in the controller 7. The detected mode L_1 signal and a signal N_0 from the potentiometer 10 are inputted to an operator 16 and the operator 16 outputs a signal representing the target rotating speed N_r of the engine in the mode L_1 . The target number of revolutions N_r is the number of revolutions at the point D in Fig. 4. The signal representing the target number of revolutions N_r and a signal representing the actual number of revolution N of the engine which has been detected by the rotation sensor 12 are inputted to an operator 17. The operator 17 outputs a signal representing their difference $\Delta N (=N_r - N)$. The output ΔN is inputted to a function generator 18 and converted to a signal I which is inputted to the servo system for the pumps. The signal I is a preset signal varying with ΔN and controls the delivery rate and pressure of each hydraulic pump.

The mode signal L_1 is also inputted to the fuel injector 9 to control it in accordance with a pattern stored in the electronic governor, i.e., along the curve AD in Fig. 4, so that the number of revolutions of the engine may be lowered along the corresponding curve of equal horsepower. At a maximum load, the engine is driven at the target number of revolutions N_r , shown at D to match with the hydraulic pumps.

In the second and third modes, the output of the engine is likewise controlled along the curves BE and CF of equal horsepower, respectively, as shown in Fig. 4.

The output torques of the engine at the maximum load points D, E and F define a difference T_1 therebetween which is smaller than the difference T_2 defined at the points A, B and C. This means a reduction in the difference of the output performances T_0 , T_e and T_r of the pump defined by its output per revolution and its output pressure when it is driven by the engine rotating at the maximum load points D, E and F, respectively, as shown in Fig. 6. It, therefore, follows that the pump which is designed for working with a maximum efficiency in the first mode L_1 , works efficiently in the other modes, too. Each of the curves b_1 , b_2 and b_3 in Fig. 6 is a curve of equal pump efficiency. Fig. 7 is a graph showing the amount of work done by the pump in each of the modes L_1 to L_3 .

Reference is now made to Fig. 8 showing a second embodiment of the method of this invention for controlling the output of the engine. This method is characterized by controlling the number of revolutions of the engine along a curve CJ passing through the point of minimum fuel consumption on the curve of equal horsepower with a reduction in the output torque of the engine as a result of a de-

crease in load, as opposed to the conventional method which controls the output of the engine along a curve CI extending from the rated point C of the engine output along the curve showing the control by a mechanical all-speed governor without taking the fuel consumption into account.

The conventional control curve CI crosses the curve *d* of equal horsepower at a point G on the curve *a*₂ of equal fuel consumption. Therefore, the fuel consumption of the engine at the point G is *a*₂ (g/ps.h). The curve *d*, however, crosses also the curve *a*₁ of equal fuel consumption. As the amount *a*₂ is smaller than *a*₁, the engine consumes a smaller amount of fuel when operated at the point H, than at the point G. If the points of minimum fuel consumption are likewise obtained for all the other points of horsepower, they define the curve CJ which enables the control of the engine output with a reduction in fuel consumption.

If the method of this invention is applied to a system including a hydraulic pump as shown in Fig. 9, a change in the number of revolutions of the engine at a low load is likely to bring about a change in the operating speed of an actuator. Therefore, the angle of a swash plate for the pump is so controlled as to ensure that the delivery flow rate *Q* (liters/min.) of the pump, which is equal to its built-in displacement *q* (cc/rev.) multiplied by the number of revolutions *N* (rpm) of the engine, be constant.

Referring further to the control system of Fig. 9, a signal P representing the actual output pressure of the pump is inputted from a pump output pressure detector 23 to an operator 15, and a signal X representing the actual output of the pump from a pump tilting detector 14 to the operator 15. The load torque of the pump is thereby calculated and a torque signal T is inputted from the operator 15 to an operator 16. The operator 16 compares the torque T with the target torque *T*₀ set by a throttle lever, and only when T is smaller than *T*₀, it outputs a signal representing their difference $\Delta T (=T_0 - T)$.

The appearance of the difference ΔT means that the engine 1 has begun to operate at a lower load, and defines a basis for the curve CJ shown in Fig. 8. The signal ΔT is inputted to a first function generator 17 and converted to a signal ΔN representing the difference in the number of revolutions of the engine. The first function generator 17 is designed for storing ΔT and ΔN in a relationship defining the curve CJ. The signal ΔN is inputted to a second, a third and a fourth function generator 18, 19 and 20. It is converted by the second function generator 18 to a rack position change signal M to set the amount Y of fuel injection, and by the third function generator 19 to set fuel injection timing *t*. If the difference ΔN between the target number of revolutions of the engine and its actual number of revolutions is large, the rack displacement M is accordingly decreased and the fuel injection timing *t* slowed down to reduce the amount Y of fuel injection by the fuel injector 9 and thereby lower the number of revolutions of the engine. This lowering in the number of revolution of the engine is likely to cause a sudden change in the output of the pump and therefore a sudden change in the operating speed of the actuator. Therefore, the fourth function generator 20 converts the signal ΔN to a pump tilting signal X and inputs it to an operator 21 to which a signal representing the number of revolution N of the engine is also inputted. The operator 21 sets a tilting angle for the pump enabling a constant product of X and N to maintain a constant pump output. The greater the lowering in the number of revolution of the engine (i.e., the larger ΔN), the greater the pump tilting signal X is, so that the output of the pump may always be maintained at a constant level.

Fig. 10 shows the curve CJ established based on ΔT and ΔN . The symbols *T*₀ and *N*_r indicate the target (or initial) values set by the throttle lever.

According to a third embodiment of this invention, it controls the outputs of an engine and the variable displacement hydraulic pumps which are driven by the engine. Referring to Fig. 11, the output of the engine is controlled by an electronic governor along a curve from the rated load point C, representing the number of revolution and output torque of the engine required for achieving the maximum output of the pump, to the point K₁ at which the curve crosses a curve *d* of equal fuel consumption passing through the point C. When the output of the engine has reached the point K₁, a signal representing the output pressure of the pump and a signal representing the number of revolution of the engine are processed by a microcomputer. The angle of the swash plate for the pump is controlled in accordance with the output of the microcomputer to maintain an equal horsepower. As a result, the pump is controlled along the curve K₁K₂ shown in Fig. 12. The curve C₁K₂ in Fig. 12 is a conventional control curve.

The built-in displacement of the pump increases along the curve from point K₂ to K₁ with a reduction of the load thereon. When it has reached the point K₁, at which the swash plate has a maximum angle, the swash plate is maintained at its maximum angle by a signal from a potentiometer, and the fuel injector is so controlled as to reduce the amount of fuel injection and thereby control the output of the engine along the curve K₁C, in Fig. 11. The output performance of the pump obtained by the control as hereinabove described is shown in Fig. 13. It shows a curve of equal horsepower defined by the combination of the engine control curve C₁K₁ and the pump control

curve K_1K_2 .

A control system which may be employed for carrying out the engine and pump control as hereinabove described is shown by the block diagram of Fig. 14. The output of the engine is set at the number of revolutions N_r by a throttle lever, and matches the load on the pump at the point C, in Fig. 15 (also Fig. 11). If the load on the pump increases, the output of the engine is controlled along a curve $C-C_1-K_1$ of equal horsepower as shown in Fig. 15.

Referring further to Fig. 14, a signal P representing the actual output pressure of the pump is inputted from a pump output pressure detector 23 to a first operator 15, and a signal X representing the tilted angle of the swash plate for the pump, i.e., the actual output of the pump, from a tilted angle detector 14 to the first operator 15. The load torque of the pump is obtained by the first operator 15 and a signal T representing it and a signal T_0 representing the torque corresponding to the target number of revolutions N_r set by the throttle lever are inputted to a second operator 16. The second operator 16 outputs a signal ΔT representing the difference between T_0 and T only when T is greater than T_0 . The signal ΔT is inputted to a first function generator 17 and converted to a signal ΔN representing the difference between the target and actual number of revolutions of the engine. The first function generator 17 is designed for storing ΔT and ΔN in a relationship which ensures that the curve C_1K_1 in Fig. 11, or curve of equal horsepower $(T_0 + \Delta T)(N_r - \Delta N) = T_0 \times N_r$, be constant. If the load on the pump has increased by ΔT , the number of revolutions of the engine is reduced by ΔN so as to match the load on the pump at point C_1 on the curve C_1K_1 of equal engine horsepower, as shown in Fig. 15.

The signal ΔN is inputted to a second, a third and a fourth function generator 18, 19 and 20. It is converted by the second function generator 18 to a rack displacement signal M, and by the third function generator 19 to a fuel injection timing signal t to set the amount Y of fuel injection. The second and third function generators 18 and 19 are preset for ensuring that the output of the engine be controlled along the curve C_1K_1 in Fig. 15, as the first function generator 17 is.

If the load on the pump further increases, it reaches the point K_1 in Fig. 15 (also Fig. 11). At the point K_1 , the torque signal ΔT is equal to ΔT_0 and the number of revolutions signal ΔN is equal to ΔN_0 and even if the torque may undergo any further change (i.e., ΔT may become larger than ΔT_0), the signal ΔN remains equal to ΔN_0 . Accordingly, the rack displacement signal M remains equal to M_0 and the fuel injection timing signal t remains equal to t_0 . Therefore, the engine continues to produce

the output shown at the point K_1 .

In case ΔT is larger than ΔT_0 , the output of the engine is not controlled, but the output of the pump is controlled. The signal ΔN is inputted to the fourth function generator 20, too, and converted to a tilted pump angle signal X. The signal X is X_0 when ΔN is not larger than ΔN_0 and decreases with an increase in ΔN if ΔN is larger than ΔN_0 . If X is equal to X_0 , the pump is tilted at a maximum angle, and if X is smaller than X_0 , the tilt angle of the pump is decreased and its output is, therefore, reduced. Thus, the control of the pump makes up for any large change in load, while the output of the engine can be maintained at the level shown at the point K_1 in Fig. 15. At any point below K_1 , the engine is controlled to make up for any such change in load (see Fig. 13).

No mode change is involved in the control method according to the second or third embodiment of this invention.

CLAIMS

1. A method of controlling an output of an internal combustion engine provided with an electronic governor means and/or an output of at least one variable displacement hydraulic pump driven by the engine, characterized in that, when the engine is operated in a range of high speed revolutions approximately equal to or exceeding the number of revolutions of the engine at a rated point on a governor control curve specific to the engine, the engine is operated at a given point on a curve of equal horsepower of the engine where an engine output torque is higher than that in the range of said high speed revolutions and where fuel consumption is lower than that in the range of said high speed revolutions, whereby the engine and/or the pump may be operated with a high efficiency.

2. A method as set forth in claim 1, wherein the output setting for the engine is variable in a plurality of modes to alter a torque requirement of a variable displacement hydraulic pump driven by the engine, characterized in that the engine is operated in such a manner that the output torque of the engine in a range of high speed revolutions at a rated point of each of said modes is altered to that at a given point on a curve of equal horsepower of the engine in each mode where a maximum output torque point of the engine on the equal horsepower curve is adjacent thereto and where fuel consumption is lower than that in the range of said high speed revolutions.

3. A method as set forth in claim 1, wherein the number of revolutions of the engine is reduced in accordance with a ratio of reduction in the output torque of the engine to a level below a predetermined value.

4. A method as set forth in claim 1, wherein a swash plate for the pump is main-

- tained at a maximum angle to maximize the built-in displacement of the pump at a low load, the output torque of the engine is increased along said curve of equal horsepower within said predetermined range of equal fuel consumption to increase the output pressure of the pump, and while said increased output torque of the engine is maintained at it is, said angle of said swash plate is decreased to reduce said built-in displacement of the pump along a curve of equal pump output curve to thereby increase the output pressure of the pump with an increase in said load.
5. A method as set forth in claim 3, wherein the number of revolutions of the engine is reduced along a curve starting at said rated point and drawn by a locus of points of minimum fuel consumption on all the curves of equal fuel consumption below said rated point.
6. A method of controlling an output of an internal combustion engine substantially as hereinbefore described with reference to the accompanying drawings.

Printed in the United Kingdom for
Her Majesty's Stationery Office, Dd 8818935, 1988, 4235.
Published at The Patent Office, 25 Southampton Buildings,
London, WC2A 1AY, from which copies may be obtained.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.